



ALUMINUM 'H' EXTRUSION



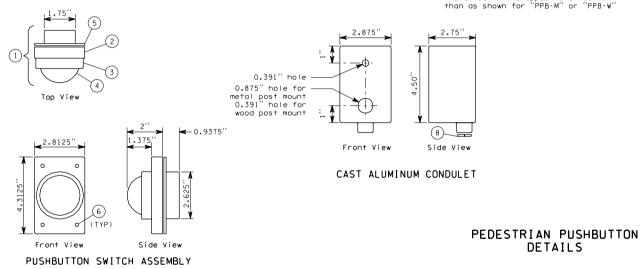

R10-4001

When "PPB-MR" or "PPB-WR" are specified in the contract, the arrow shall be installed in the opposite direction

DETAILS

KEY

1 2 3 4 5 6 7 8 Pushbutton switch assembly Cast metal housing Protective collar

Pushbutton switch

Gasket

Stainless steel fastener

Cast aluminum condulet Aluminum plug with $\frac{1}{8}$ " drilled weep hole. On timber pole installation, remove plug for wire entrance and drill weep hole in condulet.

- Aluminum 'H' extrusion
- Chase nipple $\frac{1}{8}$ " hex head x $\frac{1}{2}$ " pipe thread x $\frac{2}{2}$ " long $\frac{3}{8}$ " - 16 X $2\frac{1}{2}$ " stainless steel bolt with washer
- $\frac{3}{8}$ " X 4" lag bolt with washer
- Drill and tap shaft for $\frac{3}{8}$ " bolt
- Drill and tap shaft for $\frac{1}{2}$ " nipple Conduit and fittings as required for timber pole installation; reverse condulet and conduit for top feed
- Drill pilot hole for 3/8" lag bolt